

XRS-MD Multi-Directional Series

Front and Rotational Side beam in one unit




Making the unseen seen

Versatile and Adaptable

Blue Front beam cap

Compatible with existing accessories
Minimized image edge fade

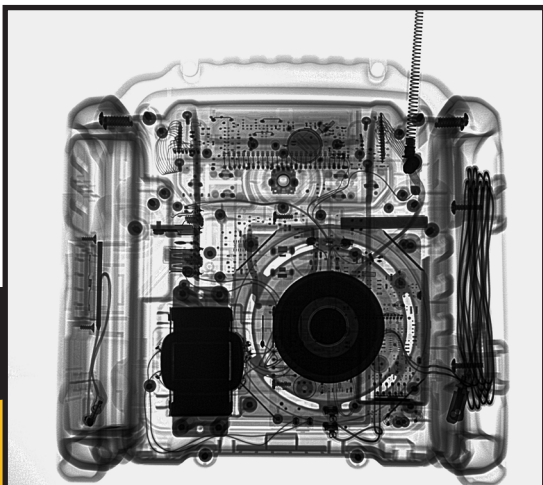

Gold Side beam cap


Rotates 360°
Operates in tight space




All-New Graphic Display



- Larger text and graphics
- Viewable in direct sunlight
- Colored text and backlight
- Extended temperature range



- Help button – access on-board context-sensitive help




- QR Code - access additional information online

Integrated Arca Swiss tripod mount



Field-Interchangeable Caps



- Adapt to the situation
- Direct X-ray beam forward or any angle out the side



Lemo connector
above battery
for easier access

	XRS3MD	XRS4MD
Dimensions (with battery)	L: 15.42" (39.17 cm)	L: 19.26" (48.92 cm)
(with Picatinny Rails)	W: 4.26" (10.82 cm)	W: 4.80" (12.19 cm)
(without key)	H: 5.83" (14.81 cm)	H: 7.05" (17.91 cm)
Weight (with battery)	11.80 lbs. (5.40 kg)	18.30 lbs (8.30 kg)
Average Output Dose*	3 mR per pulse	5 mR per pulse
Pulse Rate	21 pulses per second	9 pulses per second
Pulses per Battery charge	5500	3000
Operating Temperature	-4 to 158 °F (-20 to 70 °C)	-4 to 158 °F (-20 to 70 °C)
IP Rating	IP 54	IP 54

* Dose measured at 12" (30 cm) from source
* screen images simulated

Contact sales@goldenengineering.com
for more information or to get a quote

Golden Engineering
Portable X-ray Technology

Celebrating 50 Years
of supplying quality products,
providing extraordinary service,
improving portable X-ray technology,
and being family-owned and operated.